


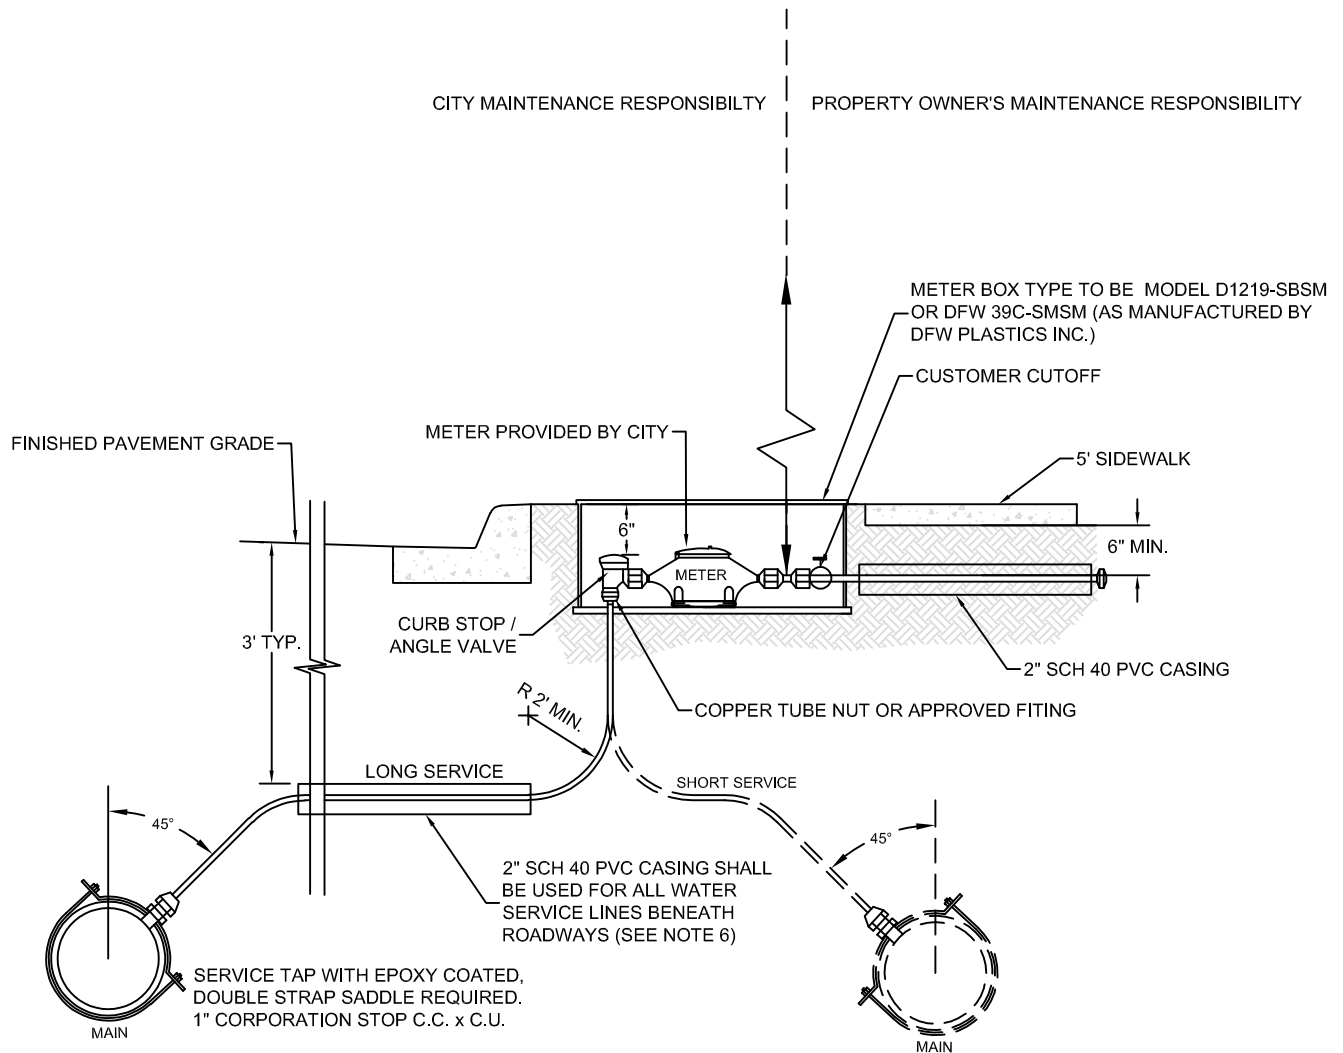

NOTES:

1. CONTRACTORS SHOULD USE HTH FOR DISINFECTION OF WATER LINES (NOT CHLORINE INJECTION) UNLESS APPROVED OTHERWISE PRIOR TO ISSUANCE OF PERMIT.
2. NEW WATERLINES SHALL BE TIED INTO EXISTING WATER SYSTEM UNDER THE SUPERVISION OF CITY PERSONNEL NO LATER THAN 14 DAYS AFTER PASSING BACTERIOLOGICAL TESTS.
3. ALL SERVICES ARE TYPE "K" COPPER OR BLUE HDPE.
4. METER BOXES WILL BE ACCOMPANIED BY AN "X" ETCHED INTO CURB FACE PAINTED BLUE.
5. NO METER BOXES TO BE SET IN DRIVEWAYS. METER BOXES SET IN DRIVEWAYS SHALL BE RELOCATED AT THE CONTRACTOR'S AND/OR DEVELOPER'S EXPENSE.
6. PVC CASING IS NOT REQUIRED FOR HDPE WATER SERVICE PIPE.