


SYMMETRICAL ABOUT  
 $\phi$

PAVEMENT REPAIR ← → NEW PAVEMENT

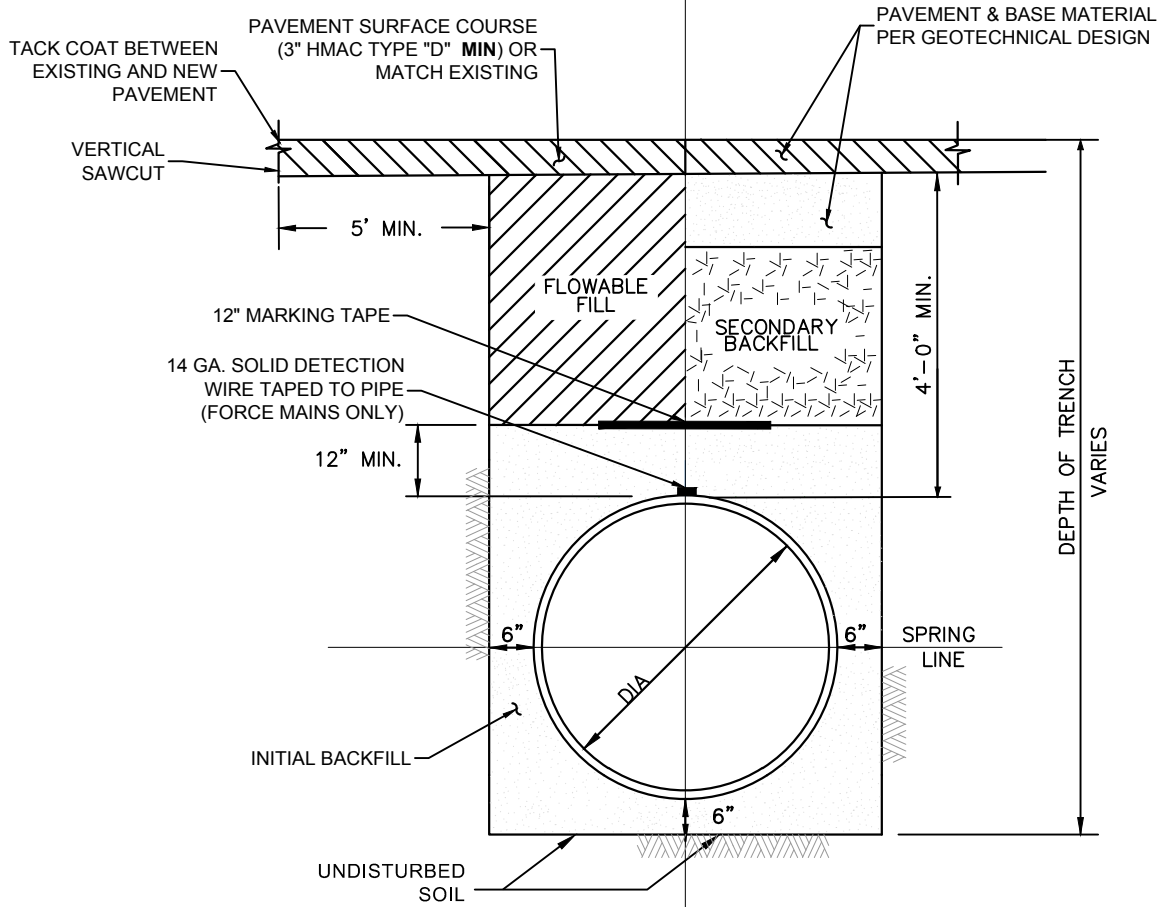

**NOTE:**

1. PUBLIC WORKS PERMIT REQUIRED FOR ALL STREET CUTS OR TAPS.
2. SAW CUTS SHALL BE STRAIGHT AND PERPENDICULAR TO THE FLOW OF TRAFFIC.
3. TACK ALL VERTICAL SURFACES.
4. IN UNPAVED AREAS, EXTEND SECONDARY BACKFILL UP TO REQUIRED TOP SOIL.
5. SUBMITTALS—PROVIDE DELIVERY TICKETS INCLUDING SOURCE LOCATION FOR EACH DELIVERY OF MATERIAL.

**INITIAL BACKFILL:**

$\frac{3}{4}$ " WASHED ROCK AROUND PIPE COMPACTED PER SPEC 02320 – UTILITY BACKFILL MATERIALS

**SECONDARY BACKFILL:**

NATIVE MATERIAL FROM TRENCH PLACED IN MAXIMUM 8" LOOSE LIFTS, FREE OF DEBRIS AND STONES LARGER THAN 4". COMPACTION TO 95% STD PROCTOR DENSITY (ASTM D 698). PER SPEC 02317